

Speed Monitor

Model SM124



HIGHLIGHTS


- ◆ Protects generator sets against overspeed
- ◆ Construction - epoxy encapsulated
- ◆ Sensing - 120 VAC



SPECIFICATIONS

- ◆ Construction - epoxy encapsulated
- ◆ Sensing - 120 VAC
- ◆ Operating trip point - 66.5 or 71 Hz (selectable)
- ◆ Switch contact rating - .6 amp, 120 VAC resistive (2 amp, 40 VDC)
- ◆ Operating temperature - -40 to +70° C (-40 to +158° F)
- ◆ Current draw - .07 amp maximum
- ◆ Voltage - 12 or 24 VDC #79029
- ◆ Accuracy - $\pm .5$ Hz
- ◆ Mounting - 2 holes

DIMENSIONS

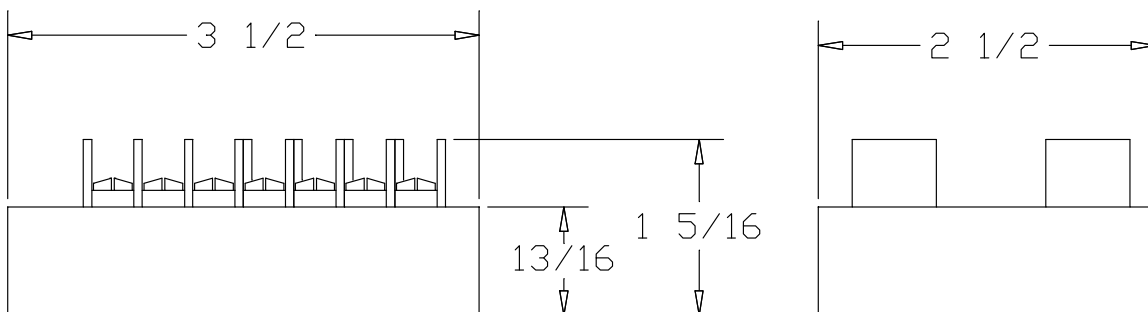


Speed Monitor

Model SM124



▶ ALTERNATIVE APPLICATIONS

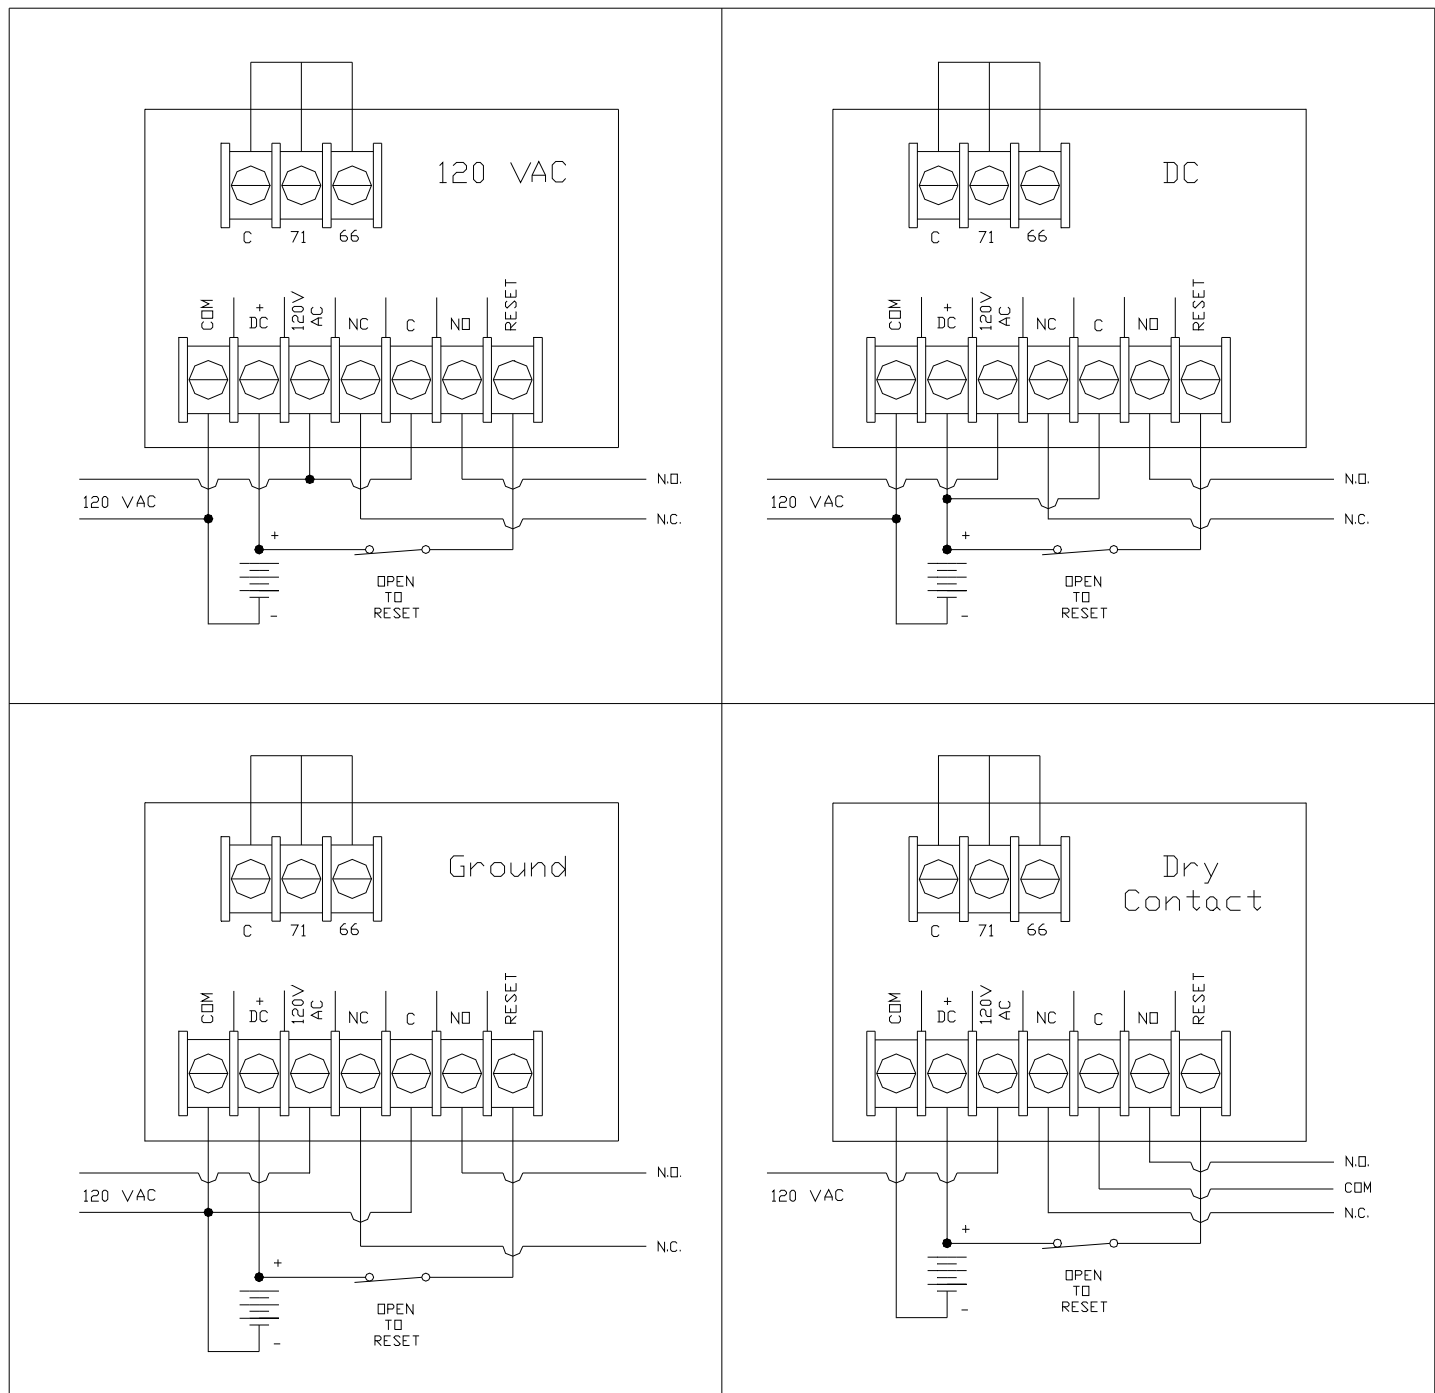

Note: Install jumper between common © and 66 or 71 to select trip frequency.

For support or information, call us at 800-325-5450 or visit us at www.mtu-online.com

Materials and specifications subject to change without notice.

MTU Onsite Energy Corporation / 100 Power Drive / Mankato, MN 56001 / USA / A Tognum Group Company